

## THREE-PHASE-ASYNCHRONOUS-MOTOR ACA 63 B 4 /HE

IE2AC06B4001

### General data

Type of motor	3~
Type designation	ACA
Frame size	63
Mounting	B3
Frame material	Aluminium
Insulationclass	F/B
Terminal box location	top DE
Terminal box orientation	cable gland to the right side
Weight (kg)	4.9
Rotation Direction	right /left
Vibration level	A
Balancing method	half key
cooling type	IC411
Executed acc. to	IEC 60034-1
noise level	IEC 60034-9

### Influential factors

Duty	S1
Ambient temperature (°C)	-20 up to +40
Height of location (m)	1000

### Electrical specification

Power 1 50Hz (kW)	0.18
Power 1 60Hz (kW)	0.18
Frequency (Hz)	50/60
Voltage 50Hz (V)	230/400
Voltage 60Hz (V)	265/460
Voltage/Frequency tolerance (not valid for range voltage)	+/-10%
Connection	Δ/Y
Poles	4
Efficiency 100% 50Hz (%)	64,7
Efficiency 75% 50Hz (%)	64,7
Efficiency 50% 50Hz (%)	63,4
Efficiency 100% 60Hz (%)	68
Power factor	0,73
Starting current factor	4,4
Starting torque factor	2,1
Tilting moment factor	2,2
Rated current 50Hz (A)	0,96/0,55
Rated current 60Hz (A)	0,79/0,46
Eff.Cl.50Hz	IE2
Eff.Cl.60Hz	IE2

### Mechanical data

Torque (Nm)	1,31/1,09
Rotation speed (1/min)	1315/1578
Bearing DE	6201.ZZ.C3
Bearing NDE	6201.ZZ.C3
Mounting of bearing DE	loose bearing
Mounting of bearing NDE	loose bearing
Bearing lifetime	20000
allow. Radial load (X/2)	375
allow. Radial load (X0)	400
allow. Radial load (Xmax)	350
allow. Axial load B3,B5,B35,B14,B34	350
allow. Axial load V1,V3,V19,V18	335


### Motor properties

Color	RAL7030
Paint surface	shiny
Protection class	IP55
Cable gland size (cable connection)	1xM20x1,5 1xblind plug
Cable gland type	Standard
Shaft end	11 x 23
Shaft material	C45
Specification NDE	Plastic fan

# Dimension drawings

## Three-Phase-Asynchronous- Motor ACA 63 B 4 /HE

### IE2AC06B4001

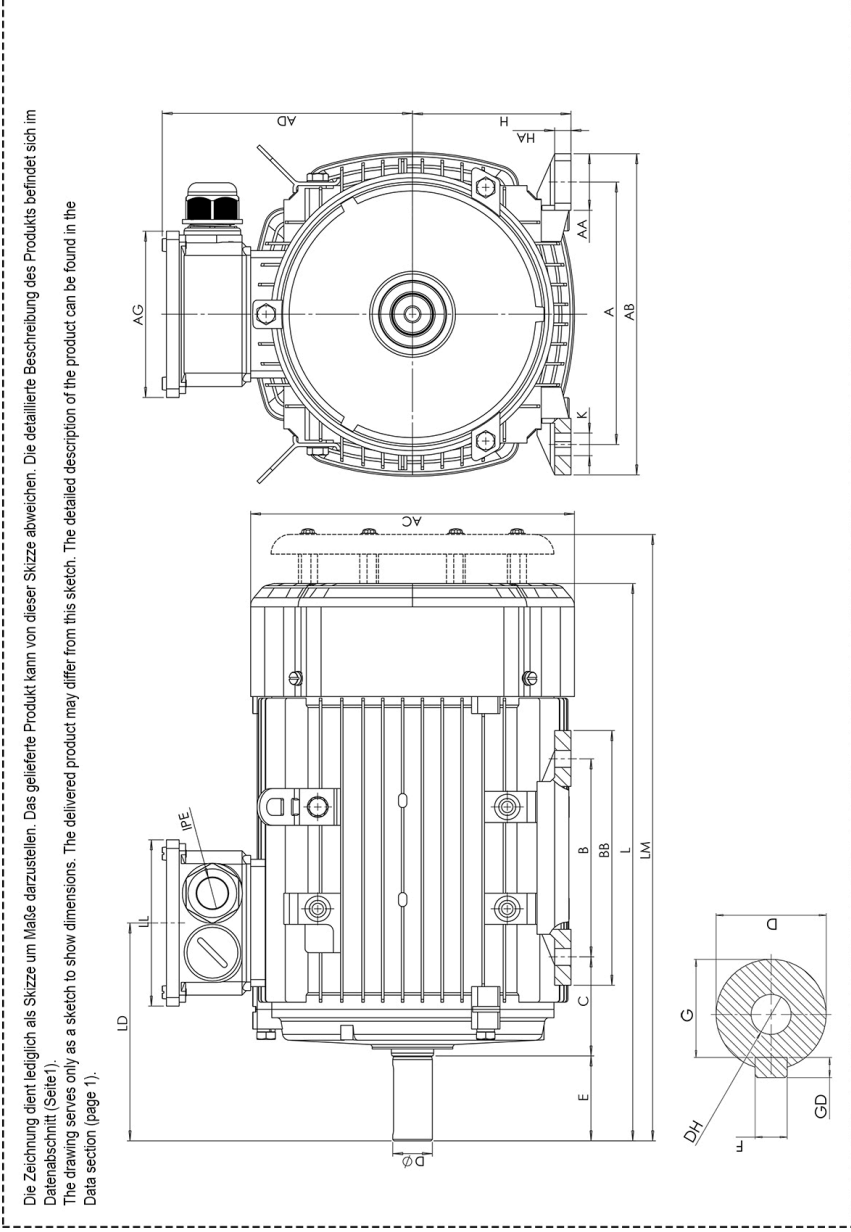

A	AA	AB	AC	AD	AG	B	BB	C	D	E	H	HA	K	L	LM	LD	LL	F	G	DH	EB	ED	GD
100	24	123	120	102	101	80	100	40	11	23	63	7	7x9,5	217	247	96	101	4	8,5	M4x12	16	3,5	4